



## E Series - e.bloxx D3 Multipurpose CAN and Serial Interface Module

**Gantner**  
instruments



e.bloxx D3



### Most important features:

- **e.bloxx D3-CAN - CAN input and output**  
CAN node 2.0A / 2.0B ref. to ISO 11898
- **e.bloxx D3-COM - RS-485 Master**  
For connecting of serial devices and fieldbus slaves, standard protocol Modbus-RTU, others on request
- **e.bloxx D3-SSI - RS-422 Master**  
For connecting absolute encoders (e.g. angle, displacement) with SSI interface (serial synchrony interface)
- **6 digital inputs and 4 digital outputs**  
Definition of functions like status or alarm
- **RS 485 fieldbus interface**  
Profibus-DP, Modbus-RTU, ASCII as well as connectable to any e.series Test Controller
- **Galvanic isolation**  
of I/O-signals, power supply and interface  
Isolation voltage 500 VDC
- **Electromagnetic Compatibility**  
according EN 61000-4 and EN 55011
- **Power supply 10...30 VDC**
- **DIN rail mounting (EN500022)**

The e.bloxx series is designed for industrial and experimental test systems requiring precise high speed measurement of electrical, thermal, and mechanical quantities in engine and component test beds.

All units are based on a clean modular design, and easily connect to the wide variety of field devices used in today's test beds. Sample rates up to 1000 Hz and resolutions up to 19 bit are possible depending on the module and signal type used. Standardised communication protocols (Profibus-DP and Modbus-RTU) allow the e.bloxx family to work with a wide variety of application hardware and software.

Adding an e.series Test Controller dramatically increases the system's throughput and connectivity options. An e.series Test Controller is a data concentrator, communication gateway, and optionally a Programmable Automation Controller (PAC) with 100Mbps Ethernet, Profibus-DP, EtherCAT, or CANopen.

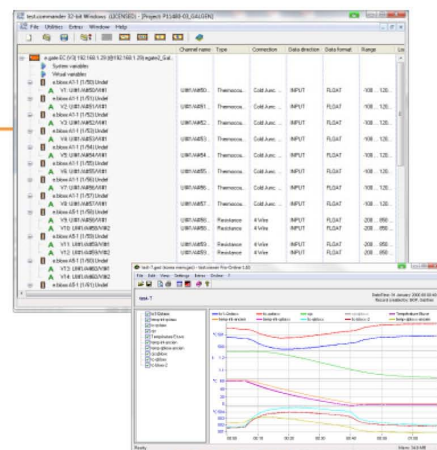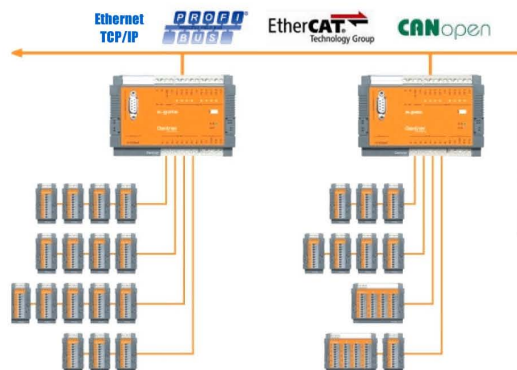

# Specifications

## CAN Interface

### e.bloxx D3-CAN

Specification:	CAN node 2.0A/2.0B
Reference:	ISO 11898
Function:	- Send and receive of data and remote frames - Recognition and generation of error frames - Synchronization
Transfer:	1 Mbps – CAN high speed
Bitset:	11/29 bit
Channels:	16 independent input or output variables

## RS-485 Interface

### e.bloxx D3-COM

Specification:	RS-485
Format:	8E1
Baud rate:	19.2; 38.4; 57.6; 93.75; 115.2 kbps
Protocols:	Modus-RTU, specific

## RS-422 Interface

### e.bloxx D3-SSI

Specification:	RS-422 / push-pull
Input:	symmetric Tx+/Tx- / Rx+/Rx-
Signal:	2-7 V ref. EIA RS-422
Code	Binary, Gray-Code
Bus clock	100 kHz, 200 kHz, 250 kHz, 400 kHz, 500 kHz, 800 kHz, 1000 kHz, 2000 kHz

## Digital In-/Output

Input	6
Function	6 x status,
Input voltage	max. 30 VDC
Input current	max. 6 mA
Upper switching threshold	> 10 V (high)
Lower switching threshold	< 2.0 V (low)
Output	4
Function	process or host controlled
Reaction time	1 ms per channel
Type of output	open collector
Output voltage	max. 30 V
Output current	max. 100 mA

## Slave Communication Interface

Standard	RS 485, 2-wire
Data format	8E1
Protocols	ASCII, Modbus-RTU, Profibus-DP Local-Bus
Baud rate	19.2; 38.4; 57.6; 93.75; 115.2 kBaud
ASCII and ModBus-RTU	19.2; 93.75; 187.5; 500; 1500 kBaud
Profibus-DP	19.2; 38.4; 57.6; 93.75; 115.2; 187.5; 500; 1500 kBaud
Local-Bus	up to 32
Connectable devices	500 V
Galvanic isolation	

## Power Supply

Power supply	10 to 30 VDC overvoltage and overload protection
Power consumption	approx. 5 W
Influence of the voltage	0.001 %/V

## Mechanical

Case	Aluminium and ABS
Dimensions (W x H x D)	70 x 90 x 83 mm
Weight	250 g
Protective system	IP20
Mounting	DIN EN-Rail

## Environmental

Operating temperature	-20 °C to +60 °C
Storage temperature	-40 °C to +85 °C
Relative humidity	5 % to 95 % at 50 °C non condensing